

# MIMO Networks: the Effects of Interference

Marco Chiani, *Senior Member, IEEE*, Moe Z. Win, *Fellow, IEEE*, and Hyundong Shin, *Member, IEEE*.

Corresponding Address:

Marco Chiani

DEIS, University of Bologna

V.le Risorgimento 2, 40136 Bologna, ITALY

Tel: +39-0512093084      Fax: +39-0512093540

e-mail: marco.chiani@unibo.it

This research was supported, in part, by the European Commission in the scope of the FP7 project CoExisting Short Range Radio by Advanced Ultra-WideBand Radio Technology (EUWB), the National Science Foundation under Grants ECCS-0636519 and ECCS-0901034, the Office of Naval Research Presidential Early Career Award for Scientists and Engineers (PECASE) N00014-09-1-0435, the MIT Institute for Soldier Nanotechnologies, the Korea Science and Engineering Foundation (KOSEF) grant funded by the Korea government (MOST) (No. R01-2007-000-11202-0), and the Basic Science Research Program through the National Research Foundation of Korea (NRF) funded by the Ministry of Education, Science and Technology.

M. Chiani is with WiLab/DEIS, University of Bologna, V.le Risorgimento 2, 40136 Bologna, ITALY (e-mail: marco.chiani@unibo.it).

M. Z. Win is with the Laboratory for Information and Decision Systems (LIDS), Massachusetts Institute of Technology, Room 32-D666, 77 Massachusetts Avenue, Cambridge, MA 02139 USA (e-mail: moewin@mit.edu).

H. Shin is with the School of Electronics and Information Kyung Hee University Yongin, Kyungki 446-701, Korea (e-mail: hshin@khu.ac.kr).

### Abstract

MIMO systems are being considered as one of the key enabling technologies for future wireless networks. However, the decrease in capacity due to the presence of interferers in MIMO networks is not well understood. In this paper, we develop an analytical framework to characterize the capacity of MIMO communication systems in the presence of multiple MIMO co-channel interferers and noise. We consider the situation in which transmitters have no channel state information and all links undergo Rayleigh fading. We first generalize the determinant representation of hypergeometric functions with matrix arguments to the case when the argument matrices have eigenvalues of arbitrary multiplicity. This enables the derivation of the distribution of the eigenvalues of Gaussian quadratic forms and Wishart matrices with arbitrary correlation, with application to both single-user and multiuser MIMO systems. In particular, we derive the ergodic mutual information for MIMO systems in the presence of multiple MIMO interferers. Our analysis is valid for any number of interferers, each with arbitrary number of antennas having possibly unequal power levels. This framework, therefore, accommodates the study of distributed MIMO systems and accounts for different spatial positions of the MIMO interferers.

### Index Terms

Eigenvalues distribution, Gaussian quadratic forms, Hypergeometric functions of matrix arguments, Interference, MIMO, Wishart matrices.

## I. INTRODUCTION

The use of multiple transmitting and receiving antennas can provide high spectral efficiency and link reliability for point-to-point communication in fading environments [1], [2]. The analysis of capacity for MIMO channels in [3] suggested practical receiver structures to obtain such spectral efficiency. Since then, many studies have been devoted to the analysis of MIMO systems, starting from the ergodic [4] and outage [5] capacity for uncorrelated fading to the case where correlation is present at one of the two sides (either at the transmitter or at the receiver) or at both sides [6]–[8]. The effect of time correlation is studied in [9].

Only a few papers, by using simulation or approximations, have studied the capacity of MIMO systems in the presence of cochannel interference. In particular, a simulation study is presented in [10] for cellular systems, assuming up to 3 transmit and 3 receive antennas. The simulations showed that cochannel interference can seriously degrade the overall capacity when MIMO links are used in cellular networks. In [11], [12] it is studied whether, in a MIMO multiuser scenario,

it is always convenient to use all transmitting antennas. It was found that for some values of SNR and SIR, allocating all power into a single transmitting antenna, rather than dividing the power equally among independent streams from the different antennas, would lead to a higher overall system mutual information. The study in [11], [12] adopts simulation to evaluate the capacity of MIMO systems in the presence of cochannel interference, and the difficulties in the evaluations limited the results to a scenario with two MIMO users employing at most two antenna elements. In [13] the replica method is used to obtain approximate moments of the capacity for MIMO systems with large number of antenna elements including the presence of interference. The approximation requires iterative numerical methods to solve a system of non-linear equations, and its accuracy has to be verified by computer simulations. A multiuser MIMO system with specific receiver structures is analyzed for the interference-limited case in [14], [15].

The MIMO capacity at high and low SNR for interference-limited scenarios is addressed in [16], [17]. A worst-case analysis for MIMO capacity with CSI at the transmitter and at the receiver, conditioned on the channel matrix, can be found in [18]. Asymptotic results for the Rician channel in the presence of interference can be found in [19].

In this paper, we develop an analytical framework to analyze the ergodic capacity of MIMO systems in the presence of multiple MIMO cochannel interferers and AWGN. Throughout the paper we consider rich scattering environments in which transmitters have no CSI, the receiver has perfect CSI, and all links undergo frequency flat Rayleigh fading. The key contributions of the paper are as follows:

- Generalization of the determinant representation of hypergeometric functions with matrix arguments to the case where matrices in the arguments have eigenvalues with arbitrary multiplicity.
- Derivation, using the generalized representation, of the joint p.d.f. of the eigenvalues of complex Gaussian quadratic forms and Wishart matrices, with arbitrary multiplicities for the eigenvalues of the associated covariance matrix.
- Derivation of the ergodic capacity of single-user MIMO systems that accounts for arbitrary power levels and arbitrary correlation across the transmitting antenna elements, or arbitrary correlation at the receiver side.
- Derivation of capacity expressions for MIMO systems in the presence of multiple MIMO interferers, valid for any number of interferers, each with arbitrary number of antennas

having possibly unequal power levels.

The paper is organized as follows: in Section II we introduce the system model for multiuser MIMO setting, relating the ergodic capacity of MIMO systems in the presence of multiple MIMO interferers to that of single-user MIMO systems with no interference. General results on hypergeometric functions of matrix arguments are given in Section III. The joint p.d.f. of eigenvalues for Gaussian quadratic forms and Wishart matrices with arbitrary correlation is given in Section IV. In Section V we give a unified expression for the capacity of single-user MIMO systems that accounts for arbitrary correlation matrix at one side. Numerical results for MIMO relay networks and multiuser MIMO are presented in Section VI, and conclusions are given in Section VII.

Throughout the paper vectors and matrices are indicated by bold,  $|\mathbf{A}|$  and  $\det \mathbf{A}$  denote the determinant of matrix  $\mathbf{A}$ , and  $a_{i,j}$  is the  $(i,j)^{\text{th}}$  element of  $\mathbf{A}$ . Expectation operator is denoted by  $\mathbb{E}\{\cdot\}$ , and in particular  $\mathbb{E}_X\{\cdot\}$  denotes expectation with respect to the random variable  $X$ . The superscript  $\dagger$  denotes conjugation and transposition,  $\mathbf{I}$  is the identity matrix (in particular  $\mathbf{I}_n$  refers to the  $(n \times n)$  identity matrix),  $\text{tr}\{\mathbf{A}\}$  is the trace of  $\mathbf{A}$  and  $\oplus$  is used for the direct sum of matrices defined as  $\mathbf{A} \oplus \mathbf{B} = \text{diag}(\mathbf{A}, \mathbf{B})$  [20].

## II. SYSTEM MODELS

We consider a network scenario as shown in Fig. 1, where a MIMO- $(N_{T0}, N_R)$  link, with  $N_{T0}$  and  $N_R$  denoting the numbers of transmitting and receiving antennas, respectively, is subject to  $N_I$  MIMO co-channel interferers from other links, each with arbitrary number of antennas. The  $N_R$ -dimensional equivalent lowpass signal  $\mathbf{y}$ , after matched filtering and sampling, at the output of the receiving antennas can be written as

$$\mathbf{y} = \mathbf{H}_0 \mathbf{x}_0 + \sum_{k=1}^{N_I} \mathbf{H}_k \mathbf{x}_k + \mathbf{n} \quad (1)$$

where  $\mathbf{x}_0, \mathbf{x}_1, \dots, \mathbf{x}_{N_I}$  denote the complex transmitted vectors with dimensions  $N_{T0}, N_{T1}, \dots, N_{TN_I}$ , respectively. Subscript 0 is used for the desired signal, while subscripts  $1, \dots, N_I$  are for the interferers. The additive noise  $\mathbf{n}$  is an  $N_R$ -dimensional random vector with zero-mean i.i.d. circularly symmetric complex Gaussian entries, each with independent real and imaginary parts having variance  $\sigma^2/2$ , so that  $\mathbb{E}\{\mathbf{n}\mathbf{n}^\dagger\} = \sigma^2 \mathbf{I}$ . The power transmitted from the  $k^{\text{th}}$  user is  $\mathbb{E}\{\mathbf{x}_k^\dagger \mathbf{x}_k\} = P_k$ .

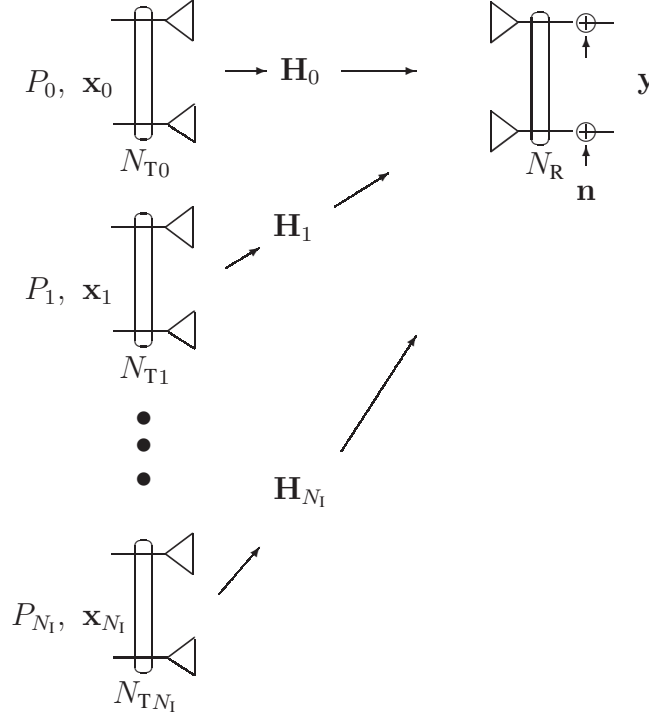


Fig. 1. MIMO Network.

The matrices  $\mathbf{H}_k$  in (1) denote the channel matrices of size  $(N_R \times N_{T_k})$  with complex elements  $h_{i,j}^{(k)}$  describing the gain of the radio channel between the  $j^{\text{th}}$  transmitting antenna of the  $k^{\text{th}}$  MIMO interferers and the  $i^{\text{th}}$  receiving antenna of the desired link. In particular,  $\mathbf{H}_0$  is the matrix describing the channel of the desired link (see Fig. 1).

When considering statistical variations of the channel, the channel gains must be described as r.v.. In particular, we assume uncorrelated MIMO Rayleigh fading channels for which the entries of  $\mathbf{H}_k$  are i.i.d. circularly symmetric complex Gaussian r.v. with zero-mean and variance one, i.e.,  $\mathbb{E} \left\{ |h_{i,j}^{(k)}|^2 \right\} = 1$ . With this normalization,  $P_k$  represents the short-term average received power per antenna element from user  $k$ , which depends on the transmit power, path-loss, and shadowing between transmitter  $k$  and the (interfered) receiver. Thus, the  $P_k$  are in general different.

Conditioned to the channel matrices  $\{\mathbf{H}_k\}_{k=0}^{N_I}$ , the mutual information between the received vector,  $\mathbf{y}$ , and the desired transmitted vector,  $\mathbf{x}_0$ , is [21]

$$\mathcal{I}(\mathbf{x}_0 ; \mathbf{y} | \{\mathbf{H}_k\}_{k=0}^{N_I}) = \mathcal{H}(\mathbf{y} | \{\mathbf{H}_k\}_{k=0}^{N_I}) - \mathcal{H}(\mathbf{y} | \mathbf{x}_0, \{\mathbf{H}_k\}_{k=0}^{N_I}) \quad (2)$$

where  $\mathcal{H}(\cdot)$  denotes differential entropy.

Here we consider the scenario in which the receiver has perfect CSI, and all the transmitters have no CSI. Note that the term CSI includes the information about the channels associated with all other MIMO interfering users. In this case, since the users do not know what is the interference seen at the receiver (if any), a reasonable strategy is that each user transmits circularly symmetric Gaussian vector signals with zero mean and i.i.d. elements. Thus, the transmit power per antenna element of the  $k^{\text{th}}$  user is  $P_k/N_{T_k}$ . Note that this model includes the case in which the power levels of the individual antennas are different: it suffices to decompose a transmitter into virtual sub-transmitters, each with the proper power level.

Hence, conditioned on all channel matrices  $\{\mathbf{H}_k\}_{k=0}^{N_I}$  in (1), both  $\mathbf{y}$  and  $\mathbf{y}|\mathbf{x}_0$  are circularly symmetric Gaussian. Since the differential entropy of a Gaussian vector is proportional to the logarithm of the determinant of its covariance matrix, we obtain the conditional mutual information

$$C_{\text{MU}}\left(\{\mathbf{H}_k\}_{k=0}^{N_I}\right) = \log \frac{\det \mathbf{K}_{\mathbf{y}}}{\det \mathbf{K}_{\mathbf{y}|\mathbf{x}_0}} \quad (3)$$

where  $\mathbf{K}_{\mathbf{y}}$  and  $\mathbf{K}_{\mathbf{y}|\mathbf{x}_0}$  respectively denote the covariance matrices of  $\mathbf{y}$  and  $\mathbf{y}|\mathbf{x}_0$ , conditioned on the channel gains  $\{\mathbf{H}_k\}_{k=0}^{N_I}$ . By expanding the covariance matrices using (1), the conditional mutual information of a MIMO link in the presence of multiple MIMO interferers with CSI only at the receiver is then given by:

$$C_{\text{MU}}\left(\{\mathbf{H}_k\}_{k=0}^{N_I}\right) = \log \frac{\det \left( \mathbf{I}_{N_R} + \tilde{\mathbf{H}}\tilde{\Psi}\tilde{\mathbf{H}}^\dagger \right)}{\det \left( \mathbf{I}_{N_R} + \mathbf{H}\Psi\mathbf{H}^\dagger \right)} \quad (4)$$

where the  $N_R \times (\sum_{i=1}^{N_I} N_{T_i})$  matrix  $\mathbf{H}$  is

$$\mathbf{H} = [\mathbf{H}_1 | \mathbf{H}_2 | \cdots | \mathbf{H}_{N_I}]$$

the  $N_R \times (\sum_{i=0}^{N_I} N_{T_i})$  matrix  $\tilde{\mathbf{H}}$  is

$$\tilde{\mathbf{H}} = [\mathbf{H}_0 | \mathbf{H}]$$

the covariance matrices  $\Psi, \tilde{\Psi}$  are

$$\Psi = \varrho_1 \mathbf{I}_{N_{T_1}} \oplus \varrho_2 \mathbf{I}_{N_{T_2}} \oplus \cdots \oplus \varrho_{N_I} \mathbf{I}_{N_{T_{N_I}}} \quad (5)$$

and

$$\tilde{\Psi} = \varrho_0 \mathbf{I}_{N_{T_0}} \oplus \Psi \quad (6)$$

with

$$\varrho_i = \frac{P_i}{N_{T_i}\sigma^2}. \quad (7)$$

With random channel matrices the mutual information in (4) is the difference between random variables of the form  $\log \det (\mathbf{I} + \mathbf{H}\Phi\mathbf{H}^\dagger)$  where the elements of  $\mathbf{H}$  are i.i.d. complex Gaussian and  $\Phi$  is a covariance matrix. The statistics of such random variables has been investigated in [6]–[8], assuming that the eigenvalues of  $\Phi$  were distinct. However, in the scenario under analysis these results cannot be used directly, since in (4) each eigenvalue  $\varrho_i$  of  $\Psi$  and  $\tilde{\Psi}$  has multiplicity  $N_{T_i}$ .

We consider the ergodic mutual information as a performance measure: taking the expectation of (4) with respect to the distribution of  $\{\mathbf{H}_k\}_{k=0}^{N_I}$ , we get

$$\mathcal{C}_{\text{MU}} \triangleq \mathbb{E} \left\{ \mathcal{C}_{\text{MU}} \left( \{\mathbf{H}_k\}_{k=0}^{N_I} \right) \right\} = \mathcal{C}_{\text{SU}} \left( \sum_{i=0}^{N_I} N_{T_i}, N_{\text{R}}, \tilde{\Psi} \right) - \mathcal{C}_{\text{SU}} \left( \sum_{i=1}^{N_I} N_{T_i}, N_{\text{R}}, \Psi \right) \quad (8)$$

where  $\mathcal{C}_{\text{SU}}(n_{\text{T}}, n_{\text{R}}, \Phi) \triangleq \mathbb{E}_{\mathbf{H}} \{ \log \det (\mathbf{I}_{n_{\text{R}}} + \mathbf{H}\Phi\mathbf{H}^\dagger) \}$  denotes the ergodic mutual information of a single-user MIMO- $(n_{\text{T}}, n_{\text{R}})$  Rayleigh fading channel with unit noise variance per receiving antenna and channel covariance matrix  $\Phi$  at the transmitter.

Note that the “building block”  $\mathbb{E}_{\mathbf{H}} \{ \log \det (\mathbf{I} + \mathbf{H}\Phi\mathbf{H}^\dagger) \}$  is simple to evaluate when the covariance matrix  $\Phi$  is proportional to an identity matrix, which corresponds to a typical interference-free case with equal transmit power among all transmitting antennas (see, e.g., [4]). In contrast, in the presence of interference, the covariance matrix is of the type indicated in (5) and (6), where the power levels of the different users are in general different. Note that even when the power for the  $i^{\text{th}}$  user is equally spread over the  $N_{T_i}$  antennas, the matrices in (5) and (6) are in general not proportional to identity matrices and their eigenvalues have multiplicities greater than one. Therefore, studying MIMO systems in the presence of multiple MIMO cochannel interferers requires the characterization of  $\mathcal{C}_{\text{SU}}(n_{\text{T}}, n_{\text{R}}, \Phi)$  in a general setting in which the covariance matrix  $\Phi$  has eigenvalues of arbitrary multiplicities.

To this aim, we derive in the next sections simple expressions for the hypergeometric functions of matrix arguments with not necessarily distinct eigenvalues; then, we obtain the joint p.d.f. of the eigenvalues of central Wishart matrices as well as that of Gaussian quadratic forms with arbitrary covariance matrix.

### III. HYPERGEOMETRIC FUNCTIONS WITH MATRIX ARGUMENTS HAVING ARBITRARY EIGENVALUES

Hypergeometric functions with matrix arguments [22] have been used extensively in multivariate statistical analysis, especially in problems related to the distribution of random matrices [23]. These functions are defined in terms of a series of zonal polynomials, and, as such, they are functions only of the eigenvalues (or latent roots) of the argument matrices [22], [23].

*Definition 1:* The hypergeometric functions of two Hermitian  $m \times m$  matrices  $\mathbf{\Lambda}$  and  $\mathbf{W}$  are defined by [22]

$${}_p\tilde{F}_q(a_1, \dots, a_p; b_1, \dots, b_q; \mathbf{\Lambda}, \mathbf{W}) \triangleq \sum_{k=0}^{\infty} \sum_{\kappa} \frac{(a_1)_{\kappa} \cdots (a_p)_{\kappa}}{(b_1)_{\kappa} \cdots (b_q)_{\kappa}} \frac{C_{\kappa}(\mathbf{\Lambda}) C_{\kappa}(\mathbf{W})}{k! C_{\kappa}(\mathbf{I}_m)} \quad (9)$$

where  $C_{\kappa}(\cdot)$  is a symmetric homogeneous polynomial of degree  $k$  in the eigenvalues of its argument, called *zonal polynomial*, the sum  $\sum_{\kappa}$  is over all partitions of  $k$ , i.e.,  $\kappa = (k_1, \dots, k_m)$  with  $k_1 \geq k_2 \geq \dots \geq k_m \geq 0$ ,  $k_1 + k_2 + \dots + k_m = k$ , and the generalized hypergeometric coefficient  $(a)_{\kappa}$  is given by  $(a)_{\kappa} = \prod_{i=1}^m (a - \frac{1}{2}(i-1))_{k_i}$  with  $(a)_k = a(a+1) \cdots (a+k-1)$ ,  $(a)_0 = 1$ .

We remark that zonal polynomials are symmetric polynomials in the eigenvalues of the matrix argument. Therefore, hypergeometric functions are only functions of the eigenvalues of their matrix arguments. In other words, without loss of generality we can replace  $\mathbf{\Lambda}$  and  $\mathbf{W}$  with the diagonal matrices  $\text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\text{diag}(w_1, \dots, w_m)$ , where  $\lambda_i$  and  $w_j$  are the eigenvalues of  $\mathbf{\Lambda}$  and  $\mathbf{W}$ , respectively. Clearly the order of  $\mathbf{\Lambda}$  and  $\mathbf{W}$  is unimportant.

It is quite evident that these functions expressed as a series of zonal polynomials are in general very difficult to manage and the form of (9) is not tractable for further analysis. Fortunately, when the eigenvalues of  $\mathbf{\Lambda}$  and  $\mathbf{W}$  are all distinct, a simpler expression in terms of determinants of matrices whose elements are hypergeometric functions of scalar arguments can be obtained as follows [24, Lemma 3]:

*Lemma 1:* ([Khatri, 1970]) Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_m$ . Then we have

$${}_p\tilde{F}_q(a_1, \dots, a_p; b_1, \dots, b_q; \mathbf{\Lambda}, \mathbf{W}) = \Gamma_{(m)}(m) \frac{\psi_q^{(m)}(b)}{\psi_p^{(m)}(a)} \frac{|\mathbf{G}|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j} (w_i - w_j)} \quad (10)$$



where  $\Gamma_{(m)}(n) \triangleq \prod_{i=1}^m (n-i)!$ ,  $\psi_q^{(m)}(b) = \prod_{i=1}^m \prod_{j=1}^q (b_j - i + 1)^{i-1}$  and the  $ij^{\text{th}}$  element of the  $(m \times m)$  matrix  $\mathbf{G}$  is defined in terms of hypergeometric functions of scalar arguments as follows

$$g_{i,j} = {}_pF_q \left( \tilde{a}_1, \dots, \tilde{a}_p; \tilde{b}_1, \dots, \tilde{b}_q; \lambda_i w_j \right) \quad (11)$$

with  $\tilde{a}_i = a_i - m + 1$  and  $\tilde{b}_i = b_i - m + 1$ .

Important particular cases are

$${}_0\tilde{F}_0(\mathbf{A}, \mathbf{W}) = \Gamma_{(m)}(m) \frac{|\mathbf{G}_0|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j} (w_i - w_j)} \quad (12)$$

and

$${}_1\tilde{F}_0(r; \mathbf{A}, \mathbf{W}) = \frac{\Gamma_{(m)}(m)}{\psi_1^{(m)}(r)} \frac{|\mathbf{G}_1|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j} (w_i - w_j)} \quad (13)$$

where the  $ij^{\text{th}}$  elements of  $\mathbf{G}_0$  and  $\mathbf{G}_1$  are given by  $e^{\lambda_i w_j}$  and  $(1 - \lambda_i w_j)^{m-r-1}$ , respectively.

These expressions have been recently used to study the distribution of Gaussian quadratic forms, to express the p.d.f. of the eigenvalues of Wishart matrices, and to analyze the information-theoretic capacity and error rates of communication systems involving multiple antennas [5]–[8], [25]–[31]. However, it is important to underline that Lemma 1 requires the eigenvalues of the matrices to be all distinct.

Here, we generalize Lemma 1 to include the case where the eigenvalues are not necessarily distinct. To this aim we first need the following lemma.

*Lemma 2:* Let  $P : \mathbf{A} \rightarrow \mathbb{R}$  be defined over  $\mathbf{A} \subset \mathbb{R}^m$  as follows:

$$P(w_1, \dots, w_m) \triangleq \frac{1}{\prod_{i < j} (w_i - w_j)} \cdot \begin{vmatrix} f_1(w_1) & f_1(w_2) & \cdots & f_1(w_m) \\ \vdots & \vdots & \cdots & \vdots \\ f_m(w_1) & f_m(w_2) & \cdots & f_m(w_m) \end{vmatrix} \quad (14)$$

where  $w_1 > w_2 > \cdots > w_m$ , and the functions  $f_i(w)$  have derivatives  $f_i^{(n)}(w) = \frac{d^n f_i(w)}{dw^n}$  of orders at least  $m-1$  throughout neighborhoods of the points  $w_1, \dots, w_m$ .

Then, the continuous extension  $\check{P}(w_1, w_2, \dots, w_m)$  of the function  $P(w_1, w_2, \dots, w_m)$  to those points in  $\mathbb{R}^m$  with  $L$  coincident arguments  $w_K = w_{K+1} = \cdots = w_{K+L-1}$  is obtained by

removing the zero factors from the denominator in (14), replacing the columns of the matrix in (14) corresponding to the coincident arguments with the successive derivatives  $f_i^{(L-l)}(w_K)$ ,  $l = 1, \dots, L$ , and dividing by a scaling factor  $\Gamma_{(L)}(L) = \prod_{i=1}^{L-1} i!$ .

For example, for  $w_1 = w_2 = \dots = w_L$ , this procedure gives

$$\check{P}(w_1, w_2, \dots, w_m) = \frac{1}{\prod_{i < j, w_i \neq w_j} (w_i - w_j) \prod_{i=1}^{L-1} i!} \cdot \begin{vmatrix} f_1^{(L-1)}(w_1) & f_1^{(L-2)}(w_1) & \dots & f_1(w_1) & f_1(w_{L+1}) & \dots & f_1(w_m) \\ \vdots & \vdots & & \vdots & \dots & \vdots & \\ f_m^{(L-1)}(w_1) & f_m^{(L-2)}(w_1) & \dots & f_m(w_1) & f_m(w_{L+1}) & \dots & f_m(w_m) \end{vmatrix}. \quad (15)$$

More generally, a similar expression is valid if there are more groups of coinciding arguments: in this case, for each group of coincident arguments  $w_K = \dots = w_{K+L-1}$  the correspondent columns of the matrix in (14) are to be replaced by  $f_i^{(L-l)}(w_K)$ ,  $l = 1, \dots, L$ , with a scaling factor  $\prod_{i=1}^{L-1} i!$ .

*Proof:* See Appendix I. □

With Lemma 2 we can now generalize (12), (13) and, more generally, (10).

*Lemma 3:* Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_k = w_{k+1} = \dots = w_{k+L-1} > w_{k+L} > \dots > w_m$ . Then we have<sup>1</sup>

$${}_0\tilde{F}_0(\mathbf{\Lambda}, \mathbf{W}) = \frac{\Gamma_{(m)}(m)}{\Gamma_{(L)}(L)} \frac{|\mathbf{G}|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j, w_i \neq w_j} (w_i - w_j)} \quad (16)$$

where the elements of  $\mathbf{G}$  are

$$g_{i,j} = \begin{cases} \lambda_i^{L-1+k-j} e^{\lambda_i w_k} & j = k, \dots, k+L-1 \\ e^{\lambda_i w_j} & \text{elsewhere} \end{cases} \quad (17)$$

that is, the matrix  $\mathbf{G}$  is the same as that appearing in (12) except that the  $L$  columns corresponding to the coincident eigenvalues are  $\lambda_i^{L-1} e^{\lambda_i w_k}, \lambda_i^{L-2} e^{\lambda_i w_k}, \dots, \lambda_i^2 e^{\lambda_i w_k}, \lambda_i e^{\lambda_i w_k}, e^{\lambda_i w_k}$ .

*Proof:* The proof is immediate by direct application of Lemma 2 with  $f_i(w) = e^{\lambda_i w}$ . □

<sup>1</sup>From here on we will use the same symbols for the functions (12), (13), (10) and their continuous extension.

Lemma 3 can be directly extended to more groups of coincident eigenvalues. In general, the rule is that each eigenvalue  $w$  of multiplicity  $L > 1$  gives rise to  $L$  columns  $\lambda_i^{L-1}e^{\lambda_i w}$ ,  $\lambda_i^{L-2}e^{\lambda_i w}, \dots, \lambda_i^2e^{\lambda_i w}, \lambda_i e^{\lambda_i w}, e^{\lambda_i w}$  in the matrix  $\mathbf{G}$  of (16), with the proper scaling factor  $\Gamma_{(L)}(L)$ .

Using Lemma 3 with  $k = m - L + 1$  and  $w_k = 0$  results in the following corollary, for the case where some eigenvalues are equal to zero.

*Corollary 1:* Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_{m-L+1} = w_{m-L+2} = \dots = w_m = 0$ . Then we have

$${}_0\tilde{F}_0(\mathbf{\Lambda}, \mathbf{W}) = \frac{\Gamma_{(m)}(m)}{\Gamma_{(L)}(L)} \frac{|\mathbf{G}|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j \leq m-L} (w_i - w_j) \prod_{i=1}^{m-L} w_i^L} \quad (18)$$

where the elements of  $\mathbf{G}$  are as follows

$$g_{i,j} = \begin{cases} \lambda_i^{m-j} & j = m - L + 1, \dots, m \\ e^{\lambda_i w_j} & \text{elsewhere.} \end{cases} \quad (19)$$

We can apply a similar methodology to derive the general expression for  ${}_1\tilde{F}_0(\cdot; \cdot, \cdot)$ , as in the following Lemma.

*Lemma 4:* Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_k = w_{k+1} = \dots = w_{k+L-1} > w_{k+L} > \dots > w_m$ . Then we have

$${}_1\tilde{F}_0(r; \mathbf{\Lambda}, \mathbf{W}) = \frac{\Gamma_{(m)}(m)}{\Gamma_{(L)}(L)} \frac{(-1)^{(L-1)L/2}}{\psi_1^{(m)}(r)} \cdot \frac{\gamma^{L-1}(\gamma-1)^{L-2} \dots (\gamma-L+2)}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j, w_i \neq w_j} (w_i - w_j)} \frac{|\mathbf{A}|}{\psi_1^{(m)}(r)} \quad (20)$$

where  $\gamma = m - r - 1$  and the  $(m \times m)$  matrix  $\mathbf{A}$  has elements as follows

$$a_{i,j} = \begin{cases} \lambda_i^{L-1+k-j} (1 - \lambda_i w_j)^{\gamma-(L-1+k-j)} & j = k, \dots, k+L-1 \\ (1 - \lambda_i w_j)^\gamma & \text{elsewhere.} \end{cases} \quad (21)$$

In other words, the matrix  $\mathbf{A}$  is the same as that appearing in (13), except that the  $L$  columns corresponding to the  $L$  coincident eigenvalues are  $\lambda_i^{L-1} (1 - \lambda_i w_k)^{\gamma-(L-1)}, \dots, \lambda_i (1 - \lambda_i w_k)^{\gamma-1}, (1 - \lambda_i w_k)^\gamma$ .

*Proof:* For the proof we apply Lemma 2 with  $f_i(w) = (1 - \lambda_i w_k)^\gamma$ , whose  $n^{\text{th}}$  derivative is  $f_i^{(n)}(w) = (-\lambda_i)^n \gamma(\gamma-1) \dots (\gamma-n+1) (1 - \lambda_i w_k)^{\gamma-n}$ .  $\square$

Lemma 4 can be further generalized to more groups of coincident eigenvalues: each eigenvalue  $w$  of multiplicity  $L > 1$  gives rise to  $L$  columns  $\lambda_i^{L-1} (1 - \lambda_i w)^{\gamma-(L-1)}, \dots, \lambda_i^2 (1 - \lambda_i w)^{\gamma-2}, \lambda_i (1 - \lambda_i w)^{\gamma-1}, (1 - \lambda_i w)^\gamma$  in the matrix  $\mathbf{A}$  of (20), and to a factor  $(-1)^{(L-1)L/2} \gamma^{L-1} \dots (\gamma-L+2) / \Gamma_{(L)}(L)$ .

Using Lemma 4 with  $k = m - L + 1$  and  $w_k = 0$  results in the following corollary.

*Corollary 2:* Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_{m-L+1} = w_{m-L+2} = \dots = w_m = 0$ . Then we have that (20) holds, with

$$a_{i,j} = \begin{cases} \lambda_i^{m-j} & j = m - L + 1, \dots, m \\ (1 - \lambda_i w_j)^\gamma & \text{elsewhere.} \end{cases} \quad (22)$$

In other words, the matrix  $\mathbf{A}$  has in this case the last  $L$  columns with elements  $\lambda_i^{L-1}, \lambda_i^{L-2}, \dots, \lambda_i, 1$ .

Finally, we give the result for the  ${}_p\tilde{F}_q(\cdot)$ .

*Lemma 5:* Let  $\mathbf{\Lambda} = \text{diag}(\lambda_1, \dots, \lambda_m)$  and  $\mathbf{W} = \text{diag}(w_1, \dots, w_m)$  with  $\lambda_1 > \dots > \lambda_m$  and  $w_1 > \dots > w_k = w_{k+1} = \dots = w_{k+L-1} > w_{k+L} > \dots > w_m$ . Then we have

$${}_p\tilde{F}_q(a_1, \dots, a_p; b_1, \dots, b_q; \mathbf{\Lambda}, \mathbf{W}) = \Xi \frac{|\mathbf{C}|}{\prod_{i < j} (\lambda_i - \lambda_j) \prod_{i < j, w_i \neq w_j} (w_i - w_j)} \quad (23)$$

where the  $(m \times m)$  matrix  $\mathbf{C}$  has elements as follows

$$c_{i,j} = \lambda_i^{L-1+k-j} {}_p\tilde{F}_q(a_1 - m + L + k - j, \dots, b_q - m + L + k - j; \lambda_i w_j) \quad (24)$$

for  $j = k, \dots, k + L - 1$ , and

$$c_{i,j} = {}_p\tilde{F}_q(\tilde{a}_1, \dots, \tilde{a}_p; \tilde{b}_1, \dots, \tilde{b}_q; \lambda_i w_j)$$

elsewhere. In (23) the constant  $\Xi$  is

$$\Xi = \frac{\Gamma_{(m)}(m)}{\Gamma_{(L)}(L)} \frac{\psi_q^{(m)}(b)}{\psi_q^{(m)}(a)} \prod_{i=1}^{L-1} \frac{(\tilde{a}_1)_i (\tilde{a}_2)_i \dots (\tilde{a}_p)_i}{(\tilde{b}_1)_i (\tilde{b}_2)_i \dots (\tilde{b}_q)_i}.$$

*Proof:* See Appendix I. □

#### IV. GAUSSIAN QUADRATIC FORMS WITH COVARIANCE MATRIX HAVING EIGENVALUES OF ARBITRARY MULTIPLICITY

We now derive the joint p.d.f. of the eigenvalues for Gaussian quadratic forms and central Wishart matrices with arbitrary one-sided correlation matrix.

*Lemma 6:* Let  $\mathbf{H}$  be a complex Gaussian  $(p \times n)$  random matrix with zero-mean, unit variance, i.i.d. entries and let  $\mathbf{\Phi}$  be an  $(n \times n)$  positive definite matrix. The joint p.d.f. of the (real) non-zero ordered eigenvalues  $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_{n_{\min}} \geq 0$  of the  $(p \times p)$  quadratic form  $\mathbf{W} = \mathbf{H}\mathbf{\Phi}\mathbf{H}^\dagger$  is given by

$$f_{\mathbf{\lambda}}(x_1, \dots, x_{n_{\min}}) = K |\mathbf{V}(\mathbf{x})| \left| \tilde{\mathbf{G}}(\mathbf{x}, \boldsymbol{\mu}) \right| \prod_{i=1}^{n_{\min}} x_i^{p-n_{\min}} \quad (25)$$

where  $n_{\min} = \min(n, p)$ ,  $\mathbf{V}(\mathbf{x})$  is the  $(n_{\min} \times n_{\min})$  Vandermonde matrix with elements  $v_{i,j} = x_j^{i-1}$ ,

$$K = \frac{(-1)^{p(n-n_{\min})}}{\Gamma_{(n_{\min})}(p)} \frac{\prod_{i=1}^L \mu_{(i)}^{m_i p}}{\prod_{i=1}^L \Gamma_{(m_i)}(m_i) \prod_{i < j} (\mu_{(i)} - \mu_{(j)})^{m_i m_j}} \quad (26)$$

and  $\mu_{(1)} > \mu_{(2)} \dots > \mu_{(L)}$  are the  $L$  distinct eigenvalues of  $\Phi^{-1}$ , with corresponding multiplicities  $m_1, \dots, m_L$  such that  $\sum_{i=1}^L m_i = n$ .

The  $(n \times n)$  matrix  $\tilde{\mathbf{G}}(\mathbf{x}, \boldsymbol{\mu})$  has elements

$$\tilde{g}_{i,j} = \begin{cases} (-x_j)^{d_i} e^{-\mu_{(e_i)} x_j} & j = 1, \dots, n_{\min} \\ [n-j]_{d_i} \mu_{(e_i)}^{n-j-d_i} & j = n_{\min} + 1, \dots, n \end{cases} \quad (27)$$

where  $[a]_k = a(a-1) \dots (a-k+1)$ ,  $[a]_0 = 1$ ,  $e_i$  denotes the unique integer such that

$$m_1 + \dots + m_{e_i-1} < i \leq m_1 + \dots + m_{e_i}$$

and

$$d_i = \sum_{k=1}^{e_i} m_k - i.$$

*Proof:* See Appendix I. □

Note that Lemma 6 gives, in a compact form, the general joint distribution for the eigenvalues of a central Wishart ( $p \geq n$ ), and central pseudo-Wishart or quadratic form ( $n \geq p$ ), with arbitrary one-sided correlation matrix with not-necessarily distinct eigenvalues.

In fact, Lemma 6 can be used for both  $p \geq n$  and  $n \geq p$ ; in particular, for  $n \geq p$  we have  $\prod_{i=1}^{n_{\min}} x_i^{p-n_{\min}} = 1$  in (25), while for  $p \geq n$  the second row in (27) disappears and  $(-1)^{p(n-n_{\min})} = 1$  in (26).

Moreover, using Lemma 6 and the results in [32], [33] we can also derive the marginal distribution of individual eigenvalues or of an arbitrary subset of the eigenvalues.

## V. ERGODIC MUTUAL INFORMATION OF A SINGLE-USER MIMO SYSTEM

In this section we provide a unified analysis of the ergodic mutual information of a single-user MIMO system with arbitrary power levels/correlation among the transmitting antenna elements or arbitrary correlation at the receiver, admitting correlation matrices with not-necessarily distinct eigenvalues.

Let us consider the function

$$\mathcal{C}_{\text{SU}}(n, p, \Phi) = \mathbb{E}_{\mathbf{H}} \{ \log \det (\mathbf{I}_p + \mathbf{H} \Phi \mathbf{H}^\dagger) \} \quad (28)$$

where  $\Phi$  is a generic  $(n \times n)$  positive definite matrix and  $\mathbf{H}$  is a  $(p \times n)$  random matrix with zero-mean, unit variance complex Gaussian i.i.d. entries.

Now, consider a single-user MIMO- $(n_T, n_R)$  Rayleigh fading channel with  $\Psi_T, \Psi_R$  denoting the  $(n_T \times n_T)$  transmit and  $(n_R \times n_R)$  receive correlation matrices, respectively, having diagonal elements equal to one. Assume the transmit vector  $\mathbf{x}$  is zero-mean complex Gaussian, with arbitrary (but fixed)  $(n_T \times n_T)$  covariance matrix  $\mathbf{Q} = \mathbb{E}\{\mathbf{x}\mathbf{x}^\dagger\}$  so that  $\text{tr}\{\mathbf{Q}\} = P$ . Then, the function (28) can be used to express the ergodic mutual information in the following cases [6]–[8]:

- 1) the MIMO- $(n_T, n_R)$  channel with no correlation at the receiver ( $\Psi_R = \mathbf{I}$ ), covariance matrix at the transmitter side  $\Psi_T$ , and transmit covariance matrix  $\mathbf{Q}$ .

In this case the mutual information is  $\mathcal{C}_{\text{SU}}(n_T, n_R, \Phi)$  with  $\Phi = (1/\sigma^2)\Psi_T\mathbf{Q}$ . If also  $\Psi_T = \mathbf{I}$ , we have  $\Phi = (1/\sigma^2)\mathbf{Q}$  and therefore  $\text{tr}\{\Phi\} = P/\sigma^2$ .

- 2) the MIMO- $(n_T, n_R)$  channel with no correlation at the transmitter ( $\Psi_T = \mathbf{I}$ ), covariance matrix at the receiver side  $\Psi_R$ , and equal power allocation  $\mathbf{Q} = P/n_T\mathbf{I}$ .

In this case the capacity is  $\mathcal{C}_{\text{SU}}(n_R, n_T, \Phi)$  with  $\Phi = (P/n_T\sigma^2)\Psi_R$ , giving  $\text{tr}\{\Phi\} = (P/\sigma^2)(n_R/n_T)$ , in accordance to [6, Theorem 1].

In both cases  $P/\sigma^2$  represents the SNR per receiving antenna.

By indicating with  $n_{\min} = \min(n, p)$  and with  $f_\lambda(\cdot, \dots, \cdot)$  the joint p.d.f. of the (real) ordered non-zero eigenvalues  $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_{n_{\min}} > 0$  of the  $(p \times p)$  random matrix  $\mathbf{W} = \mathbf{H}\Phi\mathbf{H}^\dagger$ , we can write:

$$\begin{aligned} \mathcal{C}_{\text{SU}}(n, p, \Phi) &= \mathbb{E} \left\{ \sum_{i=1}^{n_{\min}} \log(1 + \lambda_i) \right\} \\ &= \int \cdots \int_{\mathcal{D}_{\text{ord}}} f_\lambda(x_1, \dots, x_{n_{\min}}) \sum_{i=1}^{n_{\min}} \log(1 + x_i) d\mathbf{x} \end{aligned} \quad (29)$$

where the multiple integral is over the domain  $\mathcal{D}_{\text{ord}} = \{\infty > x_1 \geq x_2 \geq \dots \geq x_{n_{\min}} > 0\}$  and  $d\mathbf{x} = dx_1 dx_2 \cdots dx_{n_{\min}}$ .

The nested integral in (29) can be evaluated using the results from previous sections and Appendix II, leading to the following Theorem.

*Theorem 1:* The ergodic mutual information of a MIMO Rayleigh fading channel with CSI at the receiver only and one-sided correlation matrix  $\Phi$  having eigenvalues of arbitrary multiplicities

is given by

$$\mathcal{C}_{\text{SU}}(n, p, \mathbf{\Phi}) = K \sum_{k=1}^{n_{\min}} \det(\mathbf{R}^{(k)}). \quad (30)$$

In the previous equation  $n_{\min} = \min(n, p)$ , the matrix  $\mathbf{R}^{(k)}$  has elements

$$r_{i,j}^{(k)} = \begin{cases} (-1)^{d_i} \int_0^\infty x^{p-n_{\min}+j-1+d_i} e^{-x\mu_{(e_i)}} dx & j = 1, \dots, n_{\min}, j \neq k \\ (-1)^{d_i} \int_0^\infty x^{p-n_{\min}+j-1+d_i} e^{-x\mu_{(e_i)}} \log(1+x) dx & j = 1, \dots, n_{\min}, j = k \\ [n-j]_{d_i} \mu_{(e_i)}^{n-d_i-j} & j = n_{\min} + 1, \dots, n \end{cases} \quad (31)$$

and  $[a]_k$ ,  $e_i$ ,  $d_i$ ,  $K$  are defined as in Lemma 6, where  $\mu_{(1)} > \mu_{(2)} \dots > \mu_{(L)}$  are the  $L$  distinct eigenvalues of  $\mathbf{\Phi}^{-1}$ , with corresponding multiplicities  $m_1, \dots, m_L$ .

*Proof:*

In Section IV it is shown that the joint p.d.f. of the ordered eigenvalues of  $\mathbf{W}$  can be written as (25), where the elements of  $\mathbf{V}(\mathbf{x})$ ,  $\tilde{\mathbf{G}}(\mathbf{x}, \boldsymbol{\mu})$  are real functions of  $x_1, \dots, x_{n_{\min}}$ . Thus, by using Appendix II, the multiple integral in (29) reduces to (30).  $\square$

Note that the integral in (31) can be evaluated easily with standard numerical techniques; however, the integral can be further simplified, using the identities  $\int_0^\infty x^m e^{-x\mu} dx = m!/\mu^{m+1}$ , and  $\int_0^\infty x^m e^{-x\mu} \ln(1+x) dx = m! e^\mu \sum_{i=0}^m \Gamma(i-m, \mu)/\mu^{i+1}$ , where  $\Gamma(\cdot, \cdot)$  is the incomplete Gamma function.

Theorem 1 gives, in a unified way, the exact mutual information for MIMO systems, encompassing the cases of  $n_R \geq n_T$  and  $n_T \geq n_R$  with arbitrary correlation at the transmitter or at the receiver, avoiding the need for Monte Carlo evaluation. The application of the results in Sections III-V enables a unified analysis for MIMO systems, which allow the generalization for ergodic and outage capacity [6]–[8], [29], for optimum combining multiple antenna systems [26], [27], for MIMO-MMSE systems [28], for MIMO relay networks [34], [35], as well as for multiuser MIMO systems and for distributed MIMO systems, accounting arbitrary covariance matrices. For example, after the first derivation of the hypergeometric functions of matrices with non-distinct eigenvalues in [36], other applications to multiple antenna systems have appeared in [32], [37]–[40].

## VI. NUMERICAL RESULTS

Let us first apply Theorem 1 to the analysis of a single-user MIMO system with unequal power levels among the transmitting antennas. Figure 2 shows the ergodic mutual information<sup>2</sup> of a MIMO-(6, 3) Rayleigh channel, where the relative transmitted power levels are  $\{1 + \Delta, 1 + \Delta, 1 + \Delta, 1 - \Delta, 1 - \Delta, 1 - \Delta\}$ . The particular cases  $\Delta = 0$  and  $\Delta = 1$  are equivalent to the equal power levels over 6 and 3 transmitting antennas, respectively. This figure shows how the capacity decreases as  $\Delta$  increases from 0 to 1, with a behavior in accordance to analysis based on majorization theory [41].

As another example of application, we evaluate the performance of MIMO relay networks in Rayleigh fading [34], [35]. For such networks the network capacity is upper bounded by [35, eq. (5)], which can be easily put in the form  $C_u = \frac{1}{2} \mathbb{E}_{\mathbf{H}} \{\log \det (\mathbf{I} + \mathbf{H} \Phi \mathbf{H}^\dagger)\}$ , and evaluated in closed form by Theorem 1. In Fig. 3 we report the exact  $C_u$  as obtained from Theorem 1, compared with the Jensen's inequality [35, Theorem 1]. The figure has been obtained for a source node with 4 antennas, 5 relays each equipped with 2 antennas, as a function of the total equivalent SNR here defined as  $\text{SNR} = \text{tr} \{\Phi\}$ . We assume, for the 5 relays, that the received power is distributed proportionally to the weights  $\{1, 2, 5, 10, 20\}$ . It can be observed that the results based on the Jensen's inequality can be overly optimistic.

As a third example of application we evaluate, using (8) together with Theorem 1, the exact expression of the ergodic mutual information of MIMO systems in the presence of multiple MIMO interferers in Rayleigh fading. In particular, the eigenvalues to be used in Theorem 1 are given by  $\mu_{(i)} = 1/\varrho_i = \sigma^2 N_{T_i}/P_i$ , allowing an easy analysis for several scenarios. We define the average SNR per receiving antenna as  $\text{SNR} = P_0/\sigma^2$  giving  $\varrho_0 = \text{SNR}/N_{T_0}$ , and the SIR as  $\text{SIR} = P_0/\sum_{i \geq 1} P_i$ .<sup>3</sup> Fig. 4 shows the ergodic mutual information for a MIMO-(6, 6) system as a function of the SIR, in the presence of one MIMO cochannel interferer having  $N_{T_1}$  equal power transmitting antennas. It can be noted that the capacity decreases with the increase in the number of interfering antenna elements, tending to the curve obtained by using the Gaussian approximation.<sup>4</sup> Despite the fact that the received vector  $\mathbf{y}$  in (1) is Gaussian conditioned on

<sup>2</sup>For the numerical results we use the base 2 of logarithm in all formulas, giving a mutual information in bits/s/Hz.

<sup>3</sup>We recall that, with our normalization on the channel gains, the mean received power from user  $i$  is  $P_i$ , and our definition of SIR account for the *total* interference power.

<sup>4</sup>With Gaussian approximation the performance is evaluated as if interference were absent, except the overall noise power is set to  $\sigma^2 + \sum_{i \geq 1} P_i$ , giving a signal-to-interference-plus-noise ratio  $\text{SINR} = \left(\frac{1}{\text{SNR}} + \frac{1}{\text{SIR}}\right)^{-1}$ .



the channel matrices, and that the elements of  $\mathbf{H}_k$  are Gaussian, approximating the cumulative interference as a spatially white complex Gaussian vector is pessimistic for analyzing MIMO systems in the presence of interference, unless the number of transmitting antenna of the interferer is large compared with that of the desired user. This is because the Gaussian approximation implicitly assumes that the receiver does not exploit the CSI of the interferers (single-user receiver), whereas the exact capacity accounts for the knowledge of all CSI at the receiver. In the same figure we also report, using circles, the capacity of a single-user MIMO- $(N_{T0}, N_R - N_{T1})$  for  $N_R > N_{T1}$ . It can be observed that the capacity of the MIMO- $(N_{T0}, N_R)$  in the presence of  $N_{T1}$  interfering antenna elements approaches asymptotically, for large interference power, to a floor given by the capacity of a single-user MIMO- $(N_{T0}, N_R - N_{T1})$  system. This behavior can be thought of as using  $N_{T1}$  DoF at the receiver to null the interference in a small SIR regime. On the other hand, when  $N_R \leq N_{T1}$  the capacity approaches to zero for small SIR. This is due to the limited DoF at the receiver (related to the number  $N_R$  of receiving antenna elements) that prevents mitigating all interfering signals (one from each antenna elements) while, at the same time, processing the  $N_{T0}$  useful parallel streams, as previously observed for multiple antenna systems with optimum combining [2], [26], [27].

Finally, in Fig. 5 we consider a MIMO- $(N_{T0}, 6)$  system in the presence of one and two MIMO interferers in the network, each equipped with the same number of antennas as for the desired user. We clearly see here two different regions: for small SIR the interference effect is dominant, and it is better for all users to employ the minimum number of transmitting antennas (i.e., MIMO- $(3, 6)$  for all users), so as to allow the receiver to mitigate the interfering signals. On the contrary, for large SIR the channel tends to that of a single-user MIMO system and it is better to employ the maximum number of transmitting antennas. In the same figure we also report the capacity for interference-free channels, which represents the asymptotes of the four curves, as well as the Gaussian approximation, which incorrectly indicates that it is always better to use the largest possible number of transmitting antennas.

It can be also verified that, in a network where all nodes are using the same MIMO- $(n, n)$  systems, larger values of  $n$  achieve higher mutual information, for all values of SIR and SNR. Note, however, that when increasing the number of antennas and users, correlation may arise in the channel matrices.

## VII. CONCLUSION

We have studied MIMO communication systems in the presence of multiple MIMO interferers and noise. To this aim, we first generalized the determinant representations for hypergeometric functions with matrix arguments to the case where the eigenvalues of the argument matrices have arbitrary multiplicities. Then, we derived a unified formula for the joint p.d.f. of the eigenvalues for central Wishart matrices and Gaussian quadratic forms, allowing arbitrary multiplicities for the covariance matrix eigenvalues. These new results enable the analysis of many scenarios involving MIMO systems. For example, we derived a unified expression for the ergodic mutual information of MIMO Rayleigh fading channels, which applies to transmit or receive correlation matrices with eigenvalues of arbitrary multiplicities. We have shown how to apply the new expressions to MIMO networks, deriving in closed form the ergodic mutual information of MIMO systems in the presence of multiple MIMO interferers.

## APPENDIX I

### PROOFS

#### A. Proof of Lemma 2

For ease of notation and without loss of generality we consider the case  $K = 1$ , where the application of the lemma leads to (15). For the proof we proceed by induction. First, the result in (15) is obvious for  $L = 1$ , since in this case (15) coincides with (14). Then, we must show that if (15) is true for any  $L$  then it is also true for  $L + 1$ . So, assuming that (15) holds for  $L$ , we must find

$$\lim_{w_{L+1} \rightarrow w_L} \check{P}(w_1, \dots, w_m).$$

In this regard note that, with  $w_1 = w_2 = \dots = w_L$  the product  $\prod_{i < j, w_i \neq w_j} (w_i - w_j)$  in (15) contains exactly  $L$  factors with value  $\epsilon \triangleq w_L - w_{L+1}$ . Thus, by rewriting  $w_{L+1} = w_L - \epsilon$  we have

$$\lim_{w_{L+1} \rightarrow w_L} \check{P}(w_1, \dots, w_m) = \frac{1}{\prod_{i < j, w_i \neq w_j, j \neq L+1} (w_i - w_j) \prod_{i=1}^{L-1} i!}.$$

$$\cdot \lim_{\epsilon \rightarrow 0} \frac{1}{\epsilon^L} \begin{vmatrix} f_1^{(L-1)}(w_L) \cdots f_1(w_L) & f_1(w_L - \epsilon) & \cdots & f_1(w_m) \\ \vdots & \vdots & \cdots & \vdots \\ f_m^{(L-1)}(w_L) \cdots f_m(w_L) & f_m(w_L - \epsilon) & \cdots & f_m(w_m) \end{vmatrix}. \quad (32)$$

We can now apply the Taylor expansion to the functions

$$f_i(w - \epsilon) = \sum_{n=0}^L f_i^{(n)}(w) \frac{(-\epsilon)^n}{n!} + O(\epsilon^{L+1}), \quad (33)$$

where  $O(\epsilon)$  denotes omitted terms of order  $\epsilon$ . We also know from basic algebra that, seen as a function of a column with the others fixed, the determinant is a linear function of the entries in the given column, as is clear for example from the Laplace expansion. Therefore, we have

$$\begin{aligned} \lim_{w_{L+1} \rightarrow w_L} \check{P}(w_1, \dots, w_m) &= \\ &= \frac{1}{\prod_{i < j, w_i \neq w_j, j \neq L+1} (w_i - w_j) \prod_{i=1}^{L-1} i!} \cdot \lim_{\epsilon \rightarrow 0} \left( O(\epsilon) + \frac{1}{\epsilon^L} \sum_{n=0}^L \frac{(-\epsilon)^n}{n!} \right. \\ &\quad \cdot \left. \begin{vmatrix} f_1^{(L-1)}(w_L) \cdots f_1(w_L) & f_1^{(n)}(w_L) \cdots f_1(w_m) \\ \vdots & \vdots & \cdots & \vdots \\ f_m^{(L-1)}(w_L) \cdots f_m(w_L) & f_m^{(n)}(w_L) \cdots f_m(w_m) \end{vmatrix} \right). \end{aligned} \quad (34)$$

In the summation above the determinants for  $n = 0, \dots, L-1$  are zero since there are coincident columns. So, in the limit for  $\epsilon \rightarrow 0$  only the term of grade  $L$  remains.

By simplifying and reordering the first  $L+1$  columns of the matrix in (34), with a cyclic permutation having sign equal to  $(-1)^L$ , we finally have

$$\lim_{w_L \rightarrow w_{L+1}} \check{P}(w_1, \dots, w_m) = \frac{1}{\prod_{i < j, w_i \neq w_j} (w_i - w_j) \prod_{i=1}^L i!}.$$

$$\cdot \begin{vmatrix} f_1^{(L)}(w_{L+1}) & \cdots & f_1(w_{L+1}) & f_1(w_{L+2}) & \cdots & f_1(w_m) \\ \vdots & & \vdots & & \cdots & \vdots \\ f_m^{(L)}(w_{L+1}) & \cdots & f_m(w_{L+1}) & f_m(w_{L+2}) & \cdots & f_m(w_m) \end{vmatrix} \quad (35)$$

which is again in the form of (15). This concludes the proof by induction of Lemma 2 for  $w_1 = \cdots = w_L$ .

The extension to different  $K$  and more groups of coincident arguments is straightforward.

### B. Proof of Lemma 5.

The derivatives of the hypergeometric function of scalar arguments can be expressed as

$$\frac{d^n}{dz^n} {}_p\tilde{F}_q(a_1, \dots, a_p; b_1, \dots, b_q; z) = \frac{(a_1)_n \cdots (a_p)_n}{(b_1)_n \cdots (b_q)_n} {}_p\tilde{F}_q(a_1 + n, \dots, a_p + n; b_1 + n, \dots, b_q + n; z).$$

Using this result in Lemma 2 and (10) with

$$f_i(w) = {}_p\tilde{F}_q(\tilde{a}_1, \dots, \tilde{a}_p; \tilde{b}_1, \dots, \tilde{b}_q; \lambda_i w)$$

gives Lemma 5.

### C. Proof of Lemma 6

Here, based on Section III, we prove Lemma 6 concerning the eigenvalues distribution of Gaussian quadratic forms. The problem is related to the distribution of random matrices of the form  $\mathbf{W} = \mathbf{H}\Phi\mathbf{H}^\dagger$ , where  $\mathbf{H}$  is a Gaussian  $(p \times n)$  matrix with uncorrelated entries and  $\Phi$  is a  $(n \times n)$  positive definite matrix that represents the covariance matrix of the channel. The eigenvalues distribution has been studied for the two possible cases  $n \geq p$  and  $p \geq n$  in [6], [7], assuming a covariance matrix  $\Phi$  with distinct eigenvalues (i.e., unit multiplicity). We here generalize the results to matrices  $\Phi$  with arbitrary eigenvalue multiplicities.

Let us first recall the distributions for the case of covariance matrix with distinct eigenvalues.

1) *Correlation on the shortest side - distinct eigenvalues:* The case  $p \geq n$  has been analyzed in [6], where it is shown that the joint p.d.f. of the (real) ordered eigenvalues  $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_n$  of  $\mathbf{W}$  is

$$f_{\lambda}(x_1, \dots, x_n) = \frac{1}{\Gamma_{(n)}(p)} \frac{\prod_{i=1}^n \mu_i^p}{\prod_{i < j} (\mu_i - \mu_j)} |\mathbf{V}(\mathbf{x})| |\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})| \prod_{j=1}^n x_j^{p-n} \quad (36)$$

where  $\mu_i$  are the  $n$  distinct eigenvalues of  $\Phi^{-1}$ ,  $\mathbf{V}(\mathbf{x})$  is the  $(n \times n)$  Vandermonde matrix with elements  $v_{i,j} = x_j^{i-1}$  and where  $\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})$  is a  $(n \times n)$  matrix with elements  $g_{i,j} = e^{-\mu_i x_j}$ .

2) *Correlation on the largest side - distinct eigenvalues:* We here briefly derive the joint p.d.f. for the eigenvalues of  $\mathbf{W}$  when  $\Phi$  has all distinct eigenvalues and  $n \geq p$ , based on the results in Section III. Note that this case has been analyzed also in [7] by following a different approach.

First we recall that, given a  $(p \times n)$  random matrix  $\mathbf{H}$  with  $n \geq p$  and p.d.f.

$$\pi^{-pn} e^{-tr \mathbf{H} \mathbf{H}^\dagger} \quad (37)$$

the p.d.f. of the  $(p \times p)$  quadratic form

$$\mathbf{W} = \mathbf{H} \Phi \mathbf{H}^\dagger, \quad (38)$$

where the  $(n \times n)$  matrix  $\Phi$  is positive definite, is given by [42], [43]

$$f(\mathbf{W}) = \frac{|\mathbf{W}|^{n-p}}{\pi^{(p-1)p/2} \Gamma_{(p)}(n) |\Phi|^p} {}_0\tilde{F}_0(\Phi^{-1}, -\mathbf{W}). \quad (39)$$

Then, the joint p.d.f. of the (real) ordered eigenvalues  $\lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_p$  of  $\mathbf{W}$  is given by using the results in [22, eq. (93)] as

$$f_{\lambda}(x_1, \dots, x_p) = K_1 |\Phi|^{-p} {}_0\tilde{F}_0(\Phi^{-1}, -\mathbf{W}) |\mathbf{W}|^{n-p} \cdot \prod_{i < j}^p (x_i - x_j)^2, \quad (40)$$

where

$$K_1 = \frac{1}{\Gamma_p(n) \Gamma_p(p)}. \quad (41)$$

Note that in (40) the two matrices  $\Phi^{-1}$  and  $\mathbf{W}$  are of dimensions  $(n \times n)$  and  $(p \times p)$ , respectively. So, in (40) we evaluate  ${}_0\tilde{F}_0(\Phi^{-1}, \mathbf{B})$  where  $\mathbf{B} = -\mathbf{W} \oplus 0 \cdot \mathbf{I}_p$  is obtained by adding  $n - p$  zero eigenvalues to  $-\mathbf{W}$  [7].

Differently from the previous literature, we can now directly use Corollary 1 and get immediately the joint p.d.f. of the ordered eigenvalues of the  $(p \times p)$  matrix  $\mathbf{W}$  when  $n \geq p$  as:

$$f_{\lambda}(x_1, \dots, x_p) = \frac{(-1)^{p(n-p)}}{\Gamma_{(p)}(p)} \frac{\prod_{i=1}^n \mu_i^p}{\prod_{i < j} (\mu_i - \mu_j)} |\mathbf{V}(\mathbf{x})| |\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})| \quad (42)$$

where  $\mu_i$  are the eigenvalues of  $\Phi^{-1}$ , all of multiplicity one here,  $\mathbf{V}(\mathbf{x})$  is the  $(p \times p)$  Vandermonde matrix, and the  $(m \times m)$  matrix  $\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})$  has elements as follows

$$g_{i,j} = \begin{cases} e^{-\mu_i x_j} & j = 1, \dots, p \\ \mu_i^{n-j} & j = p+1, \dots, n \end{cases} \quad (43)$$

that is, the matrix  $\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})$  is

$$\mathbf{G}(\mathbf{x}, \boldsymbol{\mu}) \triangleq \begin{bmatrix} e^{-\mu_1 x_1} & \dots & e^{-\mu_1 x_p} & \mu_1^{n-p-1} & \mu_1^{n-p-2} & \dots & \mu_1 & 1 \\ e^{-\mu_2 x_1} & \dots & e^{-\mu_2 x_p} & \mu_2^{n-p-1} & \mu_2^{n-p-2} & \dots & \mu_2 & 1 \\ \vdots & & \vdots & \vdots & \vdots & \dots & \vdots & \vdots \\ e^{-\mu_n x_1} & \dots & e^{-\mu_n x_p} & \mu_n^{n-p-1} & \mu_n^{n-p-2} & \dots & \mu_n & 1 \end{bmatrix} = \begin{bmatrix} \mathbf{g}(\mathbf{x}, \mu_1) \\ \mathbf{g}(\mathbf{x}, \mu_2) \\ \vdots \\ \mathbf{g}(\mathbf{x}, \mu_n) \end{bmatrix}. \quad (44)$$

3) *Generalization to covariance matrix with arbitrary eigenvalues:* Note that (36) and (42) are only valid for covariance matrices with all distinct eigenvalues (multiplicity one). So, we must now generalize these expressions to the case of interest, i.e., eigenvalues  $\mu_i$  with arbitrary multiplicities. This step is possible by using Lemma 2.

In fact, we note that in both (36) and (42) we have a ratio of the form

$$\frac{|\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})|}{\prod_{i < j} (\mu_i - \mu_j)}. \quad (45)$$

By using Lemma 2, for each eigenvalue with multiplicity  $m_i$  we must replace the rows of  $\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})$  with their successive derivatives with respect to the eigenvalue, and divide by  $\Gamma_{(m_i)}(m_i)$ , obtaining

$$\frac{|\mathbf{G}(\mathbf{x}, \boldsymbol{\mu})|}{\prod_{i < j} (\mu_i - \mu_j)} \rightarrow \frac{1}{\prod_i \Gamma_{(m_i)}(m_i) \prod_{i < j} (\mu_{(i)} - \mu_{(j)})^{m_i m_j}} \det \begin{bmatrix} \mathbf{g}^{(m_1-1)}(\mathbf{x}, \mu_{(1)}) \\ \vdots \\ \mathbf{g}^{(1)}(\mathbf{x}, \mu_{(1)}) \\ \mathbf{g}^{(0)}(\mathbf{x}, \mu_{(1)}) \\ \vdots \\ \mathbf{g}^{(m_L-1)}(\mathbf{x}, \mu_{(L)}) \\ \vdots \\ \mathbf{g}^{(1)}(\mathbf{x}, \mu_{(L)}) \\ \mathbf{g}^{(0)}(\mathbf{x}, \mu_{(L)}) \end{bmatrix} \quad (46)$$

where the row vector  $\mathbf{g}^{(l)}(\mathbf{x}, \mu)$  is the  $l^{\text{th}}$  derivative of the row  $\mathbf{g}(\mathbf{x}, \mu)$  in (36) or (44). The  $j^{\text{th}}$  element of  $\mathbf{g}^{(l)}(\mathbf{x}, \mu)$  is so derived to be

$$g_j^{(l)} = g_j^{(l)}(\mu) = \begin{cases} (-x_j)^l e^{-\mu x_j} & j = 1, \dots, p \\ [n-j]_l \mu^{n-j-l} & j = p+1, \dots, n. \end{cases} \quad (47)$$

The relation between the row index,  $i$ , and the derivative order,  $l$ , can be established by introducing the function  $e_i$  indicating the eigenvalue  $\mu_{(e_i)} \in \{\mu_{(1)}, \dots, \mu_{(L)}\}$  to be used in row  $i$  of the matrix in the RHS of (46). It is easy to verify that  $e_i$  is the unique integer such that

$$m_1 + \dots + m_{e_i-1} < i \leq m_1 + \dots + m_{e_i}.$$

Then, the derivative order for the row  $i$  is  $l = d_i$ , where

$$d_i = \sum_{k=1}^{e_i} m_k - i.$$

Thus, the generic element of the matrix in the RHS of (46) is  $g_j^{(d_i)}(\mu_{(e_i)})$ .

Combining (36), (42) and (46) we have Lemma 6.

## APPENDIX II

### AN IDENTITY ON MULTIPLE INTEGRALS INVOLVING DETERMINANTS

*Theorem 2:* Given an arbitrary  $p \times p$  matrix  $\Phi(\mathbf{x})$  with  $ij^{\text{th}}$  elements  $\Phi_i(x_j)$ , an arbitrary  $n \times n$  matrix  $\Psi(\mathbf{x})$ ,  $n \geq p$ , with elements

$$\begin{cases} \Psi_i(x_j) & j = 1, \dots, p \\ \Psi_{i,j} & j = p+1, \dots, n \end{cases}$$

and two arbitrary functions  $\xi(\cdot)$  and  $\tilde{\xi}(\cdot)$  the following identity holds:

$$\begin{aligned} \int \dots \int_{\mathcal{D}_{\text{ord}}} |\Phi(\mathbf{x})| \cdot |\Psi(\mathbf{x})| \prod_{m=1}^p \xi(x_m) \sum_{i=1}^p \tilde{\xi}(x_i) d\mathbf{x} \\ = \sum_{k=1}^p \det \left( \left\{ c_{i,j}^{(k)} \right\}_{i,j=1,\dots,n} \right) \end{aligned} \quad (48)$$

where the multiple integral is over the domain  $\mathcal{D}_{\text{ord}} = \{b \geq x_1 \geq x_2 \geq \dots \geq x_p \geq a\}$ ,

$$c_{i,j}^{(k)} = \begin{cases} \int_a^b \Phi_i(x) \Psi_j(x) \xi(x) U_{k,j}(\tilde{\xi}(x)) dx & j = 1, \dots, p \\ \Psi_{i,j} & j = p+1, \dots, n \end{cases}$$

and the function  $U_{k,j}(x)$  is defined by

$$U_{k,j}(x) \triangleq \begin{cases} x & \text{if } k = j \\ 1 & \text{if } k \neq j. \end{cases} \quad (49)$$

*Proof:* As this theorem is an extension of [6, Theorem 3], it is sufficient for the proof to follow the same steps reported there.  $\square$

## ACKNOWLEDGMENTS

The authors would like to thank M. Cicognani, the Associate Editor A. Goldsmith and the anonymous reviewers for their useful comments.

## REFERENCES

- [1] J. H. Winters, "On the capacity of radio communication systems with diversity in Rayleigh fading environment," *IEEE J. Select. Areas Commun.*, vol. SAC-5, no. 5, pp. 871–878, Jun. 1987.
- [2] J. H. Winters, J. Salz, and R. D. Gitlin, "The impact of antenna diversity on the capacity of wireless communication system," *IEEE Trans. Commun.*, vol. 42, no. 2/3/4, pp. 1740–1751, Feb./Mar./Apr. 1994.
- [3] G. J. Foschini, "Layered space-time architecture for wireless communication a fading environment when using multiple antennas," *Bell Labs Tech. J.*, vol. 1, no. 2, pp. 41–59, Autumn 1996.
- [4] E. Telatar, "Capacity of multi-antenna Gaussian channels," *Europ. Trans. on Telecomm.*, vol. 10, no. 6, pp. 585–595, Nov.-Dec. 1999.
- [5] M. Chiani, "Evaluating the capacity distribution of MIMO Rayleigh fading channels," in *Proc. IEEE Int. Symp. on Advances in Wireless Commun.*, Victoria, CANADA, Sep. 2002, Invited Paper.
- [6] M. Chiani, M. Z. Win, and A. Zanella, "On the capacity of spatially correlated MIMO Rayleigh fading channels," *IEEE Trans. Inform. Theory*, vol. 49, no. 10, pp. 2363–2371, Oct. 2003.
- [7] P. J. Smith, S. Roy, and M. Shafi, "Capacity of MIMO systems with semicorrelated flat fading," *IEEE Trans. Inform. Theory*, vol. 49, no. 10, pp. 2781–2788, Oct. 2003.
- [8] H. Shin, M. Win, J. H. Lee, and M. Chiani, "On the capacity of doubly correlated MIMO channels," *IEEE Trans. Wireless Commun.*, vol. 5, no. 8, pp. 2253–2266, Aug. 2006.
- [9] A. Giorgetti, P. J. Smith, M. Shafi, and M. Chiani, "MIMO capacity, level crossing rates and fades: The impact of spatial/temporal channel correlation," *KICS/IEEE Int. Journal of Communications and Networks*, vol. 5, no. 2, pp. 104 – 115, Jun. 2003, (special issue on Coding and Signal Processing for MIMO systems).
- [10] S. Catreux, P. F. Driessen, and L. J. Greenstein, "Simulation results for an interference-limited multiple-input multiple-output cellular system," *IEEE Commun. Lett.*, vol. 4, no. 11, pp. 334–336, Nov. 2000.
- [11] R. S. Blum, J. H. Winters, and N. Sollenberger, "On the capacity of cellular systems with MIMO," *IEEE Commun. Lett.*, vol. 6, no. 6, pp. 242–244, Jun. 2002.
- [12] R. S. Blum, "MIMO capacity with interference," *IEEE J. Select. Areas Commun.*, vol. 21, no. 5, pp. 793–801, Jun. 2003.



- [13] A. L. Moustakas, S. H. Simon, and A. M. Sengupta, "MIMO capacity through correlated channels in the presence of correlated interferers and noise: A (not so) large  $n$  analysis," *IEEE Trans. Inform. Theory*, vol. 49, no. 10, pp. 2545–2561, Oct. 2003.
- [14] H. Dai and H. V. Poor, "Asymptotic spectral efficiency of multicell MIMO systems with frequency-flat fading," *Signal Processing, IEEE Transactions on*, vol. 51, no. 11, pp. 2976–2988, Nov 2003.
- [15] H. Dai, A. F. Molisch, and H. V. Poor, "Downlink capacity of interference-limited MIMO systems with joint detection," *Wireless Communications, IEEE Transactions on*, vol. 3, no. 2, pp. 442–453, March 2004.
- [16] A. Lozano, A. Tulino, and S. Verdu, "Multiple-antenna capacity in the low-power regime," *Information Theory, IEEE Transactions on*, vol. 49, no. 10, pp. 2527–2544, Oct. 2003.
- [17] —, "High-SNR power offset in multiantenna communication," *Information Theory, IEEE Transactions on*, vol. 51, no. 12, pp. 4134–4151, Dec. 2005.
- [18] E. A. Jorswieck and H. Boche, "Performance analysis of capacity of MIMO systems under multiuser interference based on worst-case noise behavior," *EURASIP Journal on Wireless Communications and Networking*, vol. 2004, no. 2, pp. 273 – 285, 2004.
- [19] G. Taricco and E. Riegler, "On the ergodic capacity of the asymptotic separately-correlated Rician fading MIMO channel with interference," in *Information Theory, 2007. ISIT 2007. IEEE International Symposium on*, Nice, France, June 2007, pp. 531–535.
- [20] R. A. Horn and C. R. Johnson, *Matrix Analysis*, 1st ed. Cambridge: Cambridge University Press, 1990.
- [21] T. A. Cover and J. A. Thomas, *Elements of Information Theory*, 1st ed. New York, NY, 10158: John Wiley & Sons, Inc., 1991.
- [22] A. T. James, "Distributions of matrix variates and latent roots derived from normal samples," *Ann. Math. Statist.*, vol. 35, pp. 475–501, 1964.
- [23] R. J. Muirhead, *Aspects of Multivariate Statistical Theory*, 1st ed. New York, NY: John Wiley & Sons, Inc, 1982.
- [24] C. G. Khatri, "On the moments of traces of two matrices in three situations for complex multivariate normal populations," *Sankhya, The Indian Journal of Statistics, Ser. A*, vol. 32, pp. 65–80, 1970.
- [25] H. Gao and P. J. Smith, "A determinant representation for the distribution of quadratic forms in complex normal vectors," *Journal of Multivariate Analysis*, vol. 73, no. 2, pp. 155 – 165, 2000.
- [26] M. Chiani, M. Z. Win, A. Zanella, R. K. Mallik, and J. H. Winters, "Bounds and approximations for optimum combining of signals in the presence of multiple co-channel interferers and thermal noise," *IEEE Trans. Commun.*, vol. 51, no. 2, pp. 296–307, Feb. 2003.
- [27] M. Chiani, M. Z. Win, and A. Zanella, "Error probability for optimum combining of  $M$ -ary PSK signals in the presence of interference and noise," *IEEE Trans. Commun.*, vol. 51, no. 11, pp. 1949–1957, Nov. 2003.
- [28] A. Zanella, M. Chiani, and M. Z. Win, "MMSE reception and successive interference cancellation for MIMO systems with high spectral efficiency," *IEEE Trans. Wireless Commun.*, vol. 4, no. 3, pp. 1244–1253, May 2005.
- [29] M. McKay and I. Collings, "General capacity bounds for spatially correlated Rician MIMO channels," *Information Theory, IEEE Transactions on*, vol. 51, no. 9, pp. 3121–3145, Sept. 2005.
- [30] M. Chiani, M. Z. Win, and A. Zanella, "On optimum combining of  $M$ -ary PSK signals with unequal-power interferers and noise," *IEEE Trans. Commun.*, vol. 53, no. 1, pp. 44–47, Jan. 2005.
- [31] A. Zanella, M. Chiani, and M. Z. Win, "Performance of MIMO MRC in correlated Rayleigh fading environments," in *Proc. IEEE Semiannual Veh. Technol. Conf.*, Stockholm, SWEDEN, May 2005.

- [32] —, “On the marginal distribution of the eigenvalues of Wishart matrices,” *IEEE Trans. Commun.*, vol. 57, no. 4, pp. 1050–1060, April 2009.
- [33] M. Chiani and A. Zanella, “Joint distribution of an arbitrary subset of the ordered eigenvalues of Wishart matrices,” in *Proc. IEEE Int. Symp. on Personal, Indoor and Mobile Radio Commun.*, Cannes, France, Sep. 2008, pp. 1–6, Invited Paper.
- [34] B. Wang, J. Zhang, and A. Host-Madsen, “On the capacity of MIMO relay channels,” *Information Theory, IEEE Transactions on*, vol. 51, no. 1, pp. 29–43, Jan. 2005.
- [35] H. Bolcskei, R. Nabar, O. Oyman, and A. Paulraj, “Capacity scaling laws in MIMO relay networks,” *Wireless Communications, IEEE Transactions on*, vol. 5, no. 6, pp. 1433–1444, June 2006.
- [36] M. Chiani, M. Z. Win, and H. Shin, “A general result on hypergeometric functions of matrix arguments and application to wireless MIMO communication,” in *Proc. IEEE International Conference on Next-Generation Wireless Systems (ICNEWS06)*, Dhaka, Bangladesh, Jan. 2006, pp. 196–200, Invited Paper.
- [37] S. Jin, M. McKay, X. Gao, and I. Collings, “MIMO multichannel beamforming: SER and outage using new eigenvalue distributions of complex noncentral Wishart matrices,” *Communications, IEEE Transactions on*, vol. 56, no. 3, pp. 424–434, March 2008.
- [38] H. Shin and M. Win, “MIMO diversity in the presence of double scattering,” *Information Theory, IEEE Transactions on*, vol. 54, no. 7, pp. 2976–2996, July 2008.
- [39] H. Kang, J. S. Kwak, T. Pratt, and G. Stuber, “Analytical framework for optimal combining with arbitrary-power interferers and thermal noise,” *Vehicular Technology, IEEE Transactions on*, vol. 57, no. 3, pp. 1564–1575, May 2008.
- [40] M. R. McKay, A. Zanella, I. B. Collings, and M. Chiani, “Error probability and SINR analysis of optimum combining in Rician fading,” *IEEE Trans. Commun.*, vol. 57, no. 3, pp. 676–687, Mar. 2009.
- [41] A. W. Marshall and I. Olkin, *Inequalities: Theory of Majorization and Its Applications*. New York: Academic, 1979.
- [42] C. G. Khatri, “On certain distribution problems based on positive definite quadratic functions in normal vectors,” *Ann. Math. Statist.*, vol. 37, pp. 468–479, 1966.
- [43] T. Hayakawa, “On the distribution of a quadratic form in a multivariate normal sample,” *The Inst. of Stat. Math.*, vol. 2, pp. 191–201, 1966.

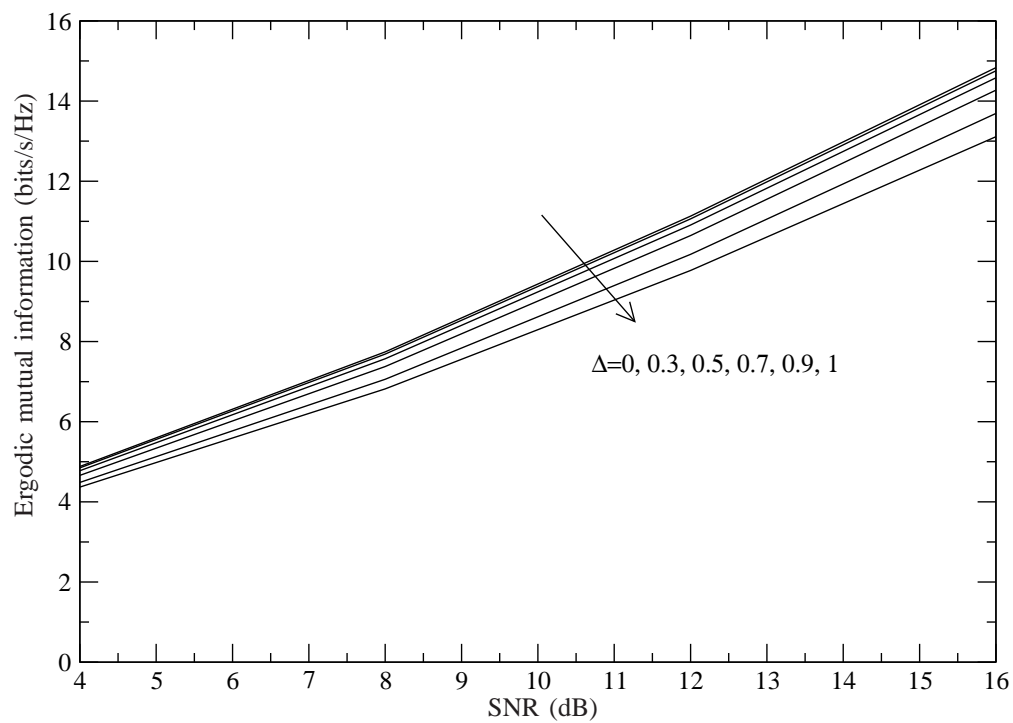


Fig. 2. Ergodic mutual information for single-user MIMO systems as a function of SNR over Rayleigh uncorrelated fading with  $n_T = 6$ ,  $n_R = 3$ . Half of the antennas with power (normalized)  $1 + \Delta$ , the others with  $1 - \Delta$ , i.e., with transmitted power levels (normalized) equal to  $\{1 + \Delta, 1 + \Delta, 1 + \Delta, 1 - \Delta, 1 - \Delta, 1 - \Delta\}$ .

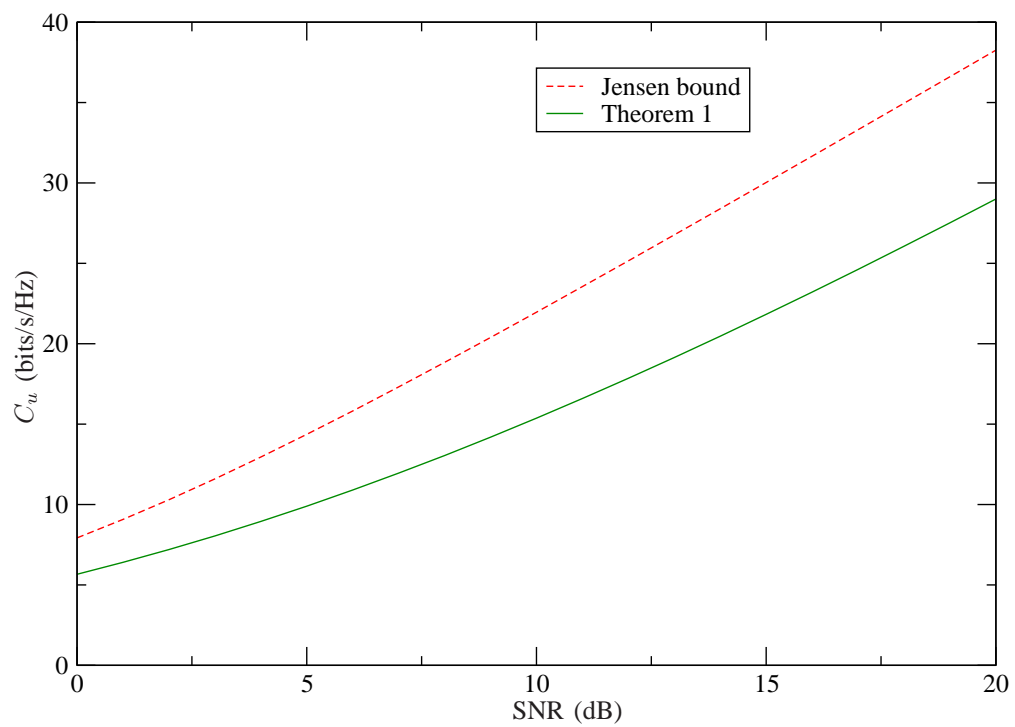


Fig. 3. Bound on the network capacity for MIMO relay networks. Source with 4 antennas, 5 relays with 2 antennas each, power levels per relay proportional to  $\{1, 2, 5, 10, 20\}$ .

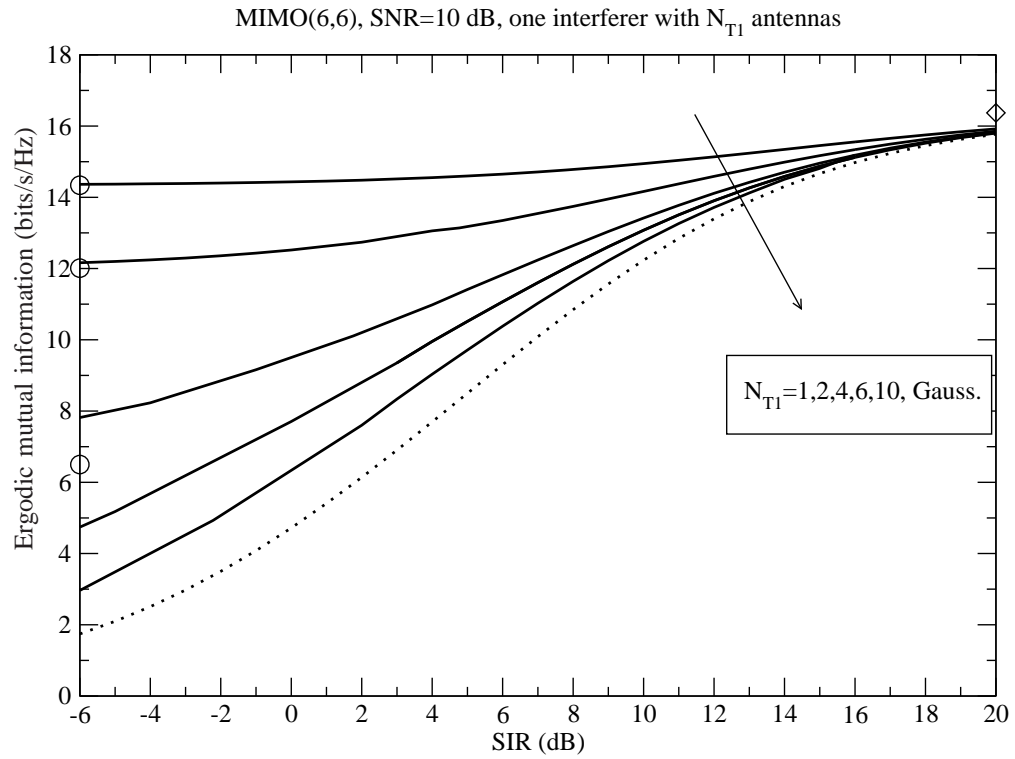


Fig. 4. Ergodic mutual information for MIMO-(6,6) as a function of SIR in the presence of one MIMO cochannel interferer with  $N_{T1} = 1, 2, 4, 6, 10$ . The SNR is set to 10 dB. The Gaussian approximation of the interference is also shown. Diamond: capacity of a single-user MIMO-(6, 6). Circles: capacity of a single-user MIMO-(6,  $6 - N_{T1}$ ) (only for  $N_{T1} = 1, 2, 4$ ).

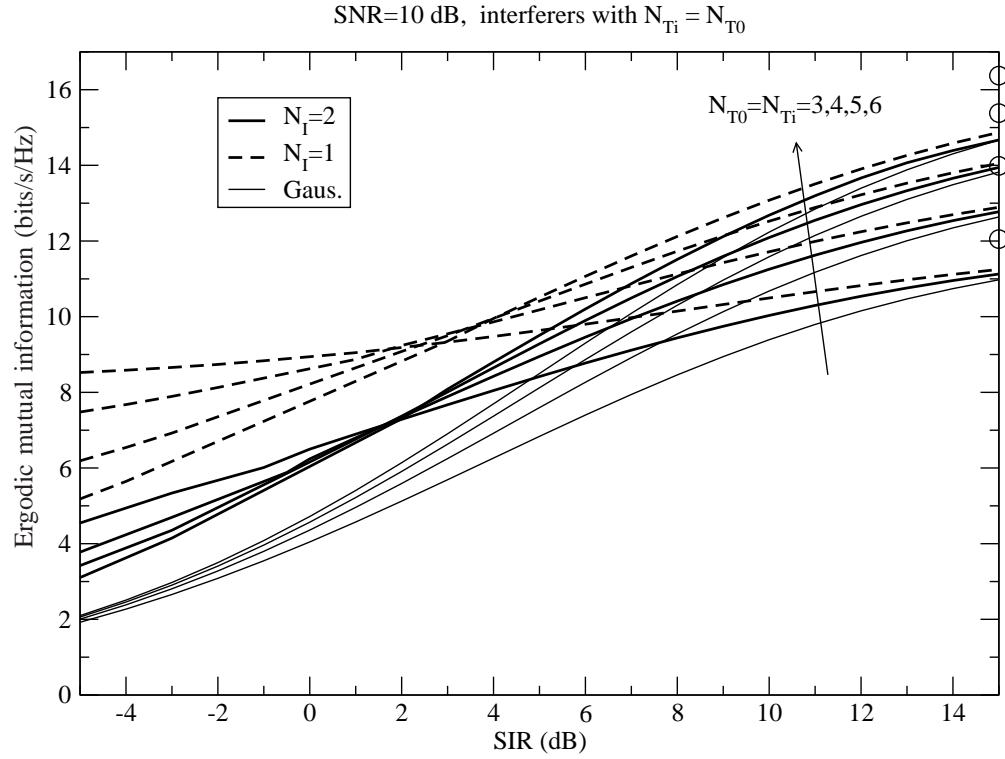


Fig. 5. Ergodic mutual information as a function of the signal-to-total interference ratio. MIMO system with  $N_R = 6$  receiving antenna,  $\text{SNR} = 10$  dB. The Gaussian approximation of the interference is also shown. Scenario with one and two interferers, each with the same number of transmitting antennas as the desired user. Cases of 3, 4, 5 and 6 transmitting antennas. Circles: capacity of single-user MIMO- $(N_{T0}, N_R)$ .

PLACE  
PHOTO  
HERE

**Marco Chiani** (M'94–SM'02) was born in Rimini, Italy, in April 1964. He received the Dr. Ing. degree (magna cum laude) in Electronic Engineering and the Ph.D. degree in Electronic and Computer Science from the University of Bologna in 1989 and 1993, respectively. Dr. Chiani is a Full Professor at the II Engineering Faculty, University of Bologna, Italy, where he is the Chair in Telecommunication. During the summer of 2001 he was a Visiting Scientist at AT&T Research Laboratories in Middletown, NJ. He is a frequent visitor at the Massachusetts Institute of Technology (MIT), where he presently holds a Research Affiliate appointment.

Dr. Chiani's research interests include wireless communication systems, MIMO systems, wireless multimedia, low density parity check codes (LDPC) and UWB. He is leading the research unit of University of Bologna on cognitive radio and UWB (European project EUWB), on Joint Source and Channel Coding for wireless video (European projects Phoenix-FP6 and Optimix-FP7), and is a consultant to the European Space Agency (ESA-ESOC) for the design and evaluation of error correcting codes based on LDPC for space CCSDS applications.

Dr. Chiani has chaired, organized sessions and served on the Technical Program Committees at several IEEE International Conferences. In January 2006 he received the ICNEWS award "For Fundamental Contributions to the Theory and Practice of Wireless Communications". He was the recipient of the 2008 IEEE ComSoc Radio Communications Committee Outstanding Service Award.

He is the past chair (2002-2004) of the Radio Communications Committee of the IEEE Communication Society and past Editor of Wireless Communication (2000-2007) for the IEEE TRANSACTIONS ON COMMUNICATIONS.

PLACE  
PHOTO  
HERE

**Moe Z. Win** (S'85-M'87-SM'97-F'04) received both the Ph.D. in Electrical Engineering and M.S. in Applied Mathematics as a Presidential Fellow at the University of Southern California (USC) in 1998. He received an M.S. in Electrical Engineering from USC in 1989, and a B.S. (*magna cum laude*) in Electrical Engineering from Texas A&M University in 1987.

Dr. Win is an Associate Professor at the Massachusetts Institute of Technology (MIT). Prior to joining MIT, he was at AT&T Research Laboratories for five years and at the Jet Propulsion Laboratory for seven years. His research encompasses developing fundamental theories, designing algorithms, and conducting experimentation for a broad range of real-world problems. His current research topics include location-aware networks, time-varying channels, multiple antenna systems, ultra-wide bandwidth systems, optical transmission systems, and space communications systems.

Professor Win is an IEEE Distinguished Lecturer and elected Fellow of the IEEE, cited for “contributions to wideband wireless transmission.” He was honored with the IEEE Eric E. Sumner Award (2006), an IEEE Technical Field Award for “pioneering contributions to ultra-wide band communications science and technology.” Together with students and colleagues, his papers have received several awards including the IEEE Communications Society’s Guglielmo Marconi Best Paper Award (2008) and the IEEE Antennas and Propagation Society’s Sergei A. Schelkunoff Transactions Prize Paper Award (2003). His other recognitions include the Laurea Honoris Causa from the University of Ferrara, Italy (2008), the Technical Recognition Award of the IEEE ComSoc Radio Communications Committee (2008), Wireless Educator of the Year Award (2007), the Fulbright Foundation Senior Scholar Lecturing and Research Fellowship (2004), the U.S. Presidential Early Career Award for Scientists and Engineers (2004), the AIAA Young Aerospace Engineer of the Year (2004), and the Office of Naval Research Young Investigator Award (2003).

Professor Win has been actively involved in organizing and chairing a number of international conferences. He served as the Technical Program Chair for the IEEE Wireless Communications and Networking Conference in 2009, the IEEE Conference on Ultra Wideband in 2006, the IEEE Communication Theory Symposia of ICC-2004 and Globecom-2000, and the IEEE Conference on Ultra Wideband Systems and Technologies in 2002; Technical Program Vice-Chair for the IEEE International Conference on Communications in 2002; and the Tutorial Chair for ICC-2009 and the IEEE Semiannual International Vehicular Technology Conference in Fall 2001. He was the chair (2004-2006) and secretary (2002-2004) for the Radio Communications Committee of the IEEE Communications Society. Dr. Win is currently an Editor for IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS. He served as Area Editor for *Modulation and Signal Design* (2003-2006), Editor for *Wideband Wireless and Diversity* (2003-2006), and Editor for *Equalization and Diversity* (1998-2003), all for the IEEE TRANSACTIONS ON COMMUNICATIONS. He was Guest-Editor for the PROCEEDINGS OF THE IEEE (Special Issue on UWB Technology & Emerging Applications) in 2009 and IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS (Special Issue on Ultra-Wideband Radio in Multiaccess Wireless Communications) in 2002.



PLACE  
PHOTO  
HERE

**Hyundong Shin** (S'01–M'04) received the B.S. degree in Electronics Engineering from Kyung Hee University, Korea, in 1999, and the M.S. and Ph.D. degrees in Electrical Engineering from Seoul National University, Seoul, Korea, in 2001 and 2004, respectively.

From September 2004 to February 2006, Dr. Shin was a Postdoctoral Associate at the Laboratory for Information and Decision Systems (LIDS), Massachusetts Institute of Technology (MIT), Cambridge, MA, USA. In March 2006, he joined the faculty of the School of Electronics and Information, Kyung Hee University, Korea, where he is now an Assistant Professor at the Department of Electronics and Radio Engineering. His research interests include wireless communications, information and coding theory, cooperative/collaborative communications, and multiple-antenna wireless communication systems and networks.

Professor Shin served as a member of the Technical Program Committee in the IEEE International Conference on Communications (2006, 2009), the IEEE International Conference on Ultra Wideband (2006), the IEEE Global Communications Conference (2009, 2010), the IEEE Vehicular Technology Conference (2009 Fall, 2010 Spring), and the IEEE International Symposium on Personal, Indoor and Mobile Communications (2009). He served as a Technical Program co-chair for the IEEE Wireless Communications and Networking Conference PHY Track (2009). Dr. Shin is currently an Editor for IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS. He was a Guest Editor for the 2008 EURASIP JOURNAL ON ADVANCES IN SIGNAL PROCESSING (Special Issue on Wireless Cooperative Networks).

Professor Shin received the IEEE Communications Society's Guglielmo Marconi Prize Paper Award (2008) and the IEEE Vehicular Technology Conference Best Paper Award (2008 Spring).